

# Matrox Concord

Family of Gigabit Ethernet NICs and IEEE 1394b adaptors.



## Key features

PCIe® x1 or conventional 32-bit PCI low-profile card

lifecycle managed and long term availability

GigE Vision® or IIDC support through Matrox Imaging Library (MIL)

pre-licensed for use with MIL GigE Vision® or IIDC drivers

pre-configured for optimal GigE Vision® performance (G-series)

fingerprint for, and storage of, supplemental MIL run-time license(s)<sup>1</sup>

programmed using Matrox Imaging Library (MIL) sold separately

supports 32-bit Windows® XP, 32/64-bit Windows® 7/8.1/10 and 32/64-bit Linux®<sup>2</sup> through MIL

## Digital video interface cards for industrial imaging

Matrox Concord is a family of Gigabit Ethernet network interface cards (NICs) and IEEE 1394b adaptors that are pre-licensed for use with the Matrox Imaging Library (MIL) drivers for the GigE Vision® and IEEE 1394 IIDC protocols. The Matrox Concord family offers a long and stable life cycle, which eliminates the burden associated with sourcing and qualifying consumer-grade boards.

### Support for established interface standards


The Matrox Concord G-series are Gigabit Ethernet NICs that provide optimum support for the GigE Vision® camera interface standard. By way of MIL, these NICs are optimally configured to minimize GigE Vision® protocol loading on the host through the default enabling of jumbo packets as well as optimal settings for the interrupt throttling rate and number of receive buffers. Unlike generic NICs, using the Matrox Concord G-series with MIL does not require manually adjusting advanced driver properties. Auto medium-dependent interface crossover (MDIX) further simplifies setup by automatically detecting and crossing over signals for peer-to-peer connections thereby eliminating the need for special cables.

The Matrox Concord F-series are IEEE 1394b adaptors that, through MIL, enable the use of leading IEEE 1394 industrial cameras implementing the standard IIDC protocol. These adaptors, by way of MIL, support up to the S400 and S800<sup>3</sup> modes of IEEE 1394a and 1394b respectively, ensuring maximum camera performance and minimal transfer latency. In addition, the use of bilingual copper connectivity permits for cost-effective cabling.


**TECHWAY**  
SIGNAL VISION SYSTEM



## Matrox Concord GE/GX

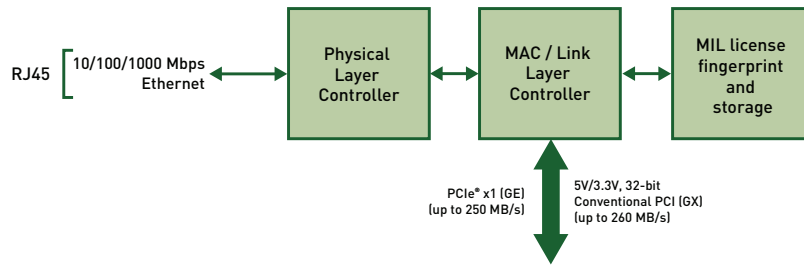

## Matrox Concord FE/FX

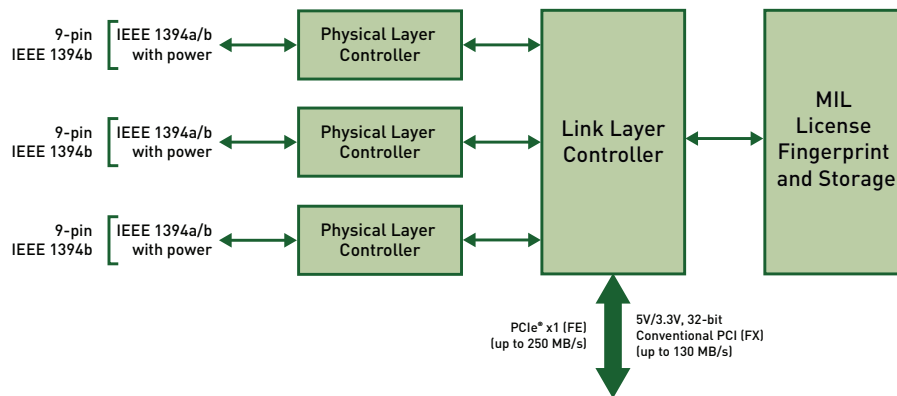

### Field-proven application development software

Matrox Concord is supported by the Matrox Imaging Library (MIL), a comprehensive collection of software tools for developing industrial imaging applications. MIL features interactive software and programming functions for image capture, processing, analysis, annotation, display and archiving. These tools are designed to enhance productivity, thereby reducing the time and effort required to bring your solution to market. Refer to the MIL datasheet for more information.

### Managed lifecycle

Matrox Concord boards are manufactured with strict change control to ensure a consistent supply through a long life cycle. Longevity of stable supply lets OEMs achieve maximum return on the original investment without incurring the additional costs associated with qualifying new boards.

## Specifications

### Matrox Concord GE/GX - Hardware

- PCIe® x1 (GE) or 32-bit, 66 MHz conventional PCI (GX) universal (3.3V/5V) host bus interface
- Intel® Gigabit Ethernet PHY/MAC/Link controller
- single port
- handles 10/100/1000 Mbps connections
- supports Jumbo frames/packets up to 9014 bytes
- selectable interrupt moderation rate
- resizeable receive buffers/descriptors
- supports auto MDIX (signal crossover)
- standard RJ45 connector

### Power consumption and Dimensions

- GE: 3.3V @ 0.44 A (1.45 W) typical
- GX: 5V @ 0.4 A (2 W) typical
- PCI low-profile<sup>4</sup>, sub-half-length
- GE: 7.4 cm L x 6.9 cm H x 1.6 cm W (2.9" x 2.7" x 0.62") from bottom edge of goldfinger to top edge of board and without bracket
- GX: 11.9 cm L x 6.4 cm H x 1.6 cm W (4.7" x 2.5" x 0.62") from bottom edge of goldfinger to top edge of board and without bracket

### Matrox Concord FE/FX - Hardware

- PCIe® x1 (FE) or 32-bit, 33 MHz conventional PCI (FX) universal (3.3V/5V) host bus interface
- Texas Instruments physical/link layer controller
- OHCI compliant
- three (3) bilingual IEEE 1394a/b ports
- 9-pin connector for copper cabling
- provides power (up to 12 W per port)

### Power consumption and Dimensions

- FE: 3.3V @ 0.33 A (1.1 W) typical
- FX: 5V @ 0.2 A (1 W) typical
- PCI low-profile<sup>4</sup>, half-length
- FE: 8.6 cm L x 6.9 cm H x 1.6 cm W (3.4" x 2.7" x 0.62") from bottom edge of goldfinger to top edge of board and without bracket
- FX: 11.9 cm L x 6.4 cm H x 1.6 cm W (4.7" x 2.5" x 0.62") from bottom edge of goldfinger to top edge of board and without bracket

## Specifications (Cont.)

### Environmental information

- operating temperature: 0°C to 55° C (32° F to 131° F)
- relative humidity: up to 95% (non-condensing)

### Certifications

- FCC part 15 class A
- CE class A
- RoHS-compliant

### Software Drivers

- Matrox Imaging Library (MIL) drivers for 32-bit Windows® XP and 32/64-bit Windows® 7/8.1/10
- MIL drivers for 32/64-bit Linux<sup>®2</sup>

## Ordering Information

### Hardware

#### Part number & Description

<b>CON 1G E*</b>	Single-port PCIe® x1 Gigabit Ethernet network interface card (NIC) pre-licensed for MIL Interface package (GigE Vision® driver). Acts as a fingerprint for, and handles storage of, supplemental MIL license(s).
<b>CON 1G X*</b>	Single-port 32-bit conventional PCI Gigabit Ethernet network interface card (NIC) pre-licensed for MIL Interface package (GigE Vision® driver). Acts as a fingerprint for, and handles storage of, supplemental MIL license(s).
<b>CON 3F E*</b>	Triple-port PCIe® x1 IEEE 1394 adaptor card pre-licensed for MIL Interface package (IEEE 1394 IIDC driver). Acts as a fingerprint for, and handles storage of, supplemental MIL license(s).
<b>CON 3F X*</b>	Triple-port 32-bit conventional PCI IEEE 1394 adaptor card pre-licensed for MIL Interface package (IEEE 1394 driver). Acts as a fingerprint for, and handles storage of, supplemental MIL license(s).

### Software

Refer to MIL datasheet.

#### Notes:

1. Feature not supported under Linux.
2. Only with Matrox Concord G-series.
3. S800 mode is supported under 32-bit Windows® XP with a partial roll back to SP1 if using SP2.
4. Contact local representative or Matrox Imaging Sales for availability of optional low-profile I/O bracket.



19 Avenue de Norvège  
91140 Villebon sur Yvette  
FRANCE

info@techway.fr  
+33 (0)1 64 53 37 90

www.techway.fr

For more information, please call: 1-800-804-6243 (toll free in North America) or (514) 822-6020  
or e-mail: [imaging.info@matrox.com](mailto:imaging.info@matrox.com) or <http://www.matrox.com/imaging>

**matrox**®

All trademarks by their respective owners are hereby acknowledged. Matrox Electronic Systems, Ltd. reserves the right to make changes in specifications at any time and without notice. The information furnished by Matrox Electronic Systems, Ltd. is believed to be accurate and reliable. However, no responsibility license is granted under any patents or patent rights of Matrox Electronic Systems, Ltd. Windows and Microsoft are trademarks of Microsoft Corporation. © Matrox Electronic Systems, 2008-2014. Printed in Canada, 2016-09-12 **\$1E-5412-B**

Matrox Imaging est distribué par TECHWAY S.A.S. - [www.techway.fr](http://www.techway.fr) - [info@techway.fr](mailto:info@techway.fr) - +33 1 64 53 37 90