



Matrox 4Sight EV6 >>

Fanless industrial imaging computer



Overview

Machine vision for the factory floor

Matrox® 4Sight EV6 is an industrial computer built for machine vision on the factory floor. Part of a long and solid history, the Matrox 4Sight EV6 is an evolution of its immediate predecessor, integrating a seventh-generation quad-core Intel® Core™ processor for ever more demanding multi-camera applications.

A fanless design with multiple ports for GigE Vision® and USB3 Vision® cameras make the Matrox 4Sight EV6 right at home in any production facility, keeping an eye on a single line or many production lines. Matrox 4Sight EV6 vision controllers are supported by two comprehensive software platforms: Matrox Design Assistant X is a flowchart-based integrated development environment (IDE), whereas Matrox Imaging Library (MIL) X is a software development kit (SDK) for more traditional programmers. Each software offers tools for video capture, analysis, classification, location, measurement, reading, verification, communication, and I/O operations so that engineers and technicians can quickly configure and deploy machine vision applications to Matrox 4Sight EV6 vision controllers.

Multiple ports with power for cameras

Matrox 4Sight EV6 is equipped with four Gigabit Ethernet and four SuperSpeed USB ports for connecting to the full range of available GigE Vision and USB3 Vision cameras. The Gigabit Ethernet ports support PoE to further simplify cabling and thus reduce costs when opting for suitable GigE Vision cameras. Powered by a mobile-class embedded processor, Matrox 4Sight EV6 has what it takes to cost-effectively handle typical multi-camera inspections.

Factory and enterprise connectivity

Matrox 4Sight EV6 provides the necessary connectivity for interfacing to other industrial equipment and communicating with enterprise systems. RS-232/RS-485 ports support connections to legacy automation devices, while two additional Gigabit Ethernet ports provide independent connections to industrial and enterprise networks. These networking ports include a hardware-assisted mechanism for PROFINET® communication. This mechanism ensures timely response when the automation controller is set up for a short cycle-time or when the processor is too busy performing other tasks.

Industrial-strength design and longevity

The fanless design of the Matrox 4Sight EV6 reduces physical maintenance, eliminating the need to clean or replace an air filter or a worn-out fan. A small, rugged footprint casing and wide ambient operational temperature range allows the Matrox 4Sight EV6 to be mounted either horizontally or vertically in hostile, space-limited locations. Moreover, careful component selections secure the long-term availability of the Matrox 4Sight EV6.

Matrox 4Sight EV6 at a glance

Reduce service stoppages with a fanless design

Inspect multiple sites through the support for four GigE Vision and four USB3 Vision cameras

Simplify cabling for GigE Vision installations using Power-over-Ethernet (PoE)-enabled ports

Tackle typical vision workloads with a mobile-class embedded seventh-generation Intel Core processor

Connect separately to the factory floor and enterprise networks via two more Gigabit Ethernet ports

Synchronize with other equipment using the integrated real-time digital I/Os with rotary encoder support and RS-232/RS-485 ports

Streamline application development using the Matrox Design Assistant X flowchart-based IDE or the MIL X SDK

Tackle machine vision applications with utmost confidence using field-proven tools for analyzing, locating, classifying, measuring, reading, and verifying

Leverage machine learning including deep learning to categorize image content

Real-time discrete I/Os

Discrete I/O management is achieved through a dedicated hardware-assisted mechanism on the Matrox 4Sight EV6. The mechanism enables output events to occur at precise moments in time, based on elapsed time, or for specific input events. An input event can come directly from a discrete input—including from a rotary encoder—or be count-derived from a discrete input. Programmed output events are stored in a hardware list, which is traversed based on a clock or an input event. The carrying out of an output event results in a state transition, pulse, or pulse train on a specific discrete output. Multiple cascadable hardware timers are available to count or generate specific events. The Matrox 4Sight EV6 has what it takes to effectively synchronize a typical vision application with a manufacturing line.

Software Environment

Microsoft Windows 10 IoT Enterprise

Matrox 4Sight EV6 comes pre-installed with Microsoft® Windows® 10 IoT Enterprise 2019 (64-bit), which provides the familiarity, performance, and reliability of Windows 10—including the Unified Write Filter (UWF) to prevent corruptions caused by unanticipated power-downs—and multi-language support.


Field-proven application development software

Matrox 4Sight EV6 is supported by MIL X¹ software—a comprehensive SDK with a 25-year history of reliable performance. This toolkit features interactive software and programming functions for image capture, processing, analysis, annotation, display, and

archiving operations, with the accuracy and robustness needed to tackle the most demanding machine vision applications. Refer to the MIL X datasheet for more information.


Matrox 4Sight EV6 is also available with, and licensed for, Matrox Design Assistant X¹ software, a versatile and extendable IDE. Vision applications are created by constructing an intuitive flowchart instead of writing traditional programming code. A custom, web-based operator interface to the application is created through an integrated HTML visual editor. Refer to the Matrox Design Assistant X datasheet for more information.

Connectivity

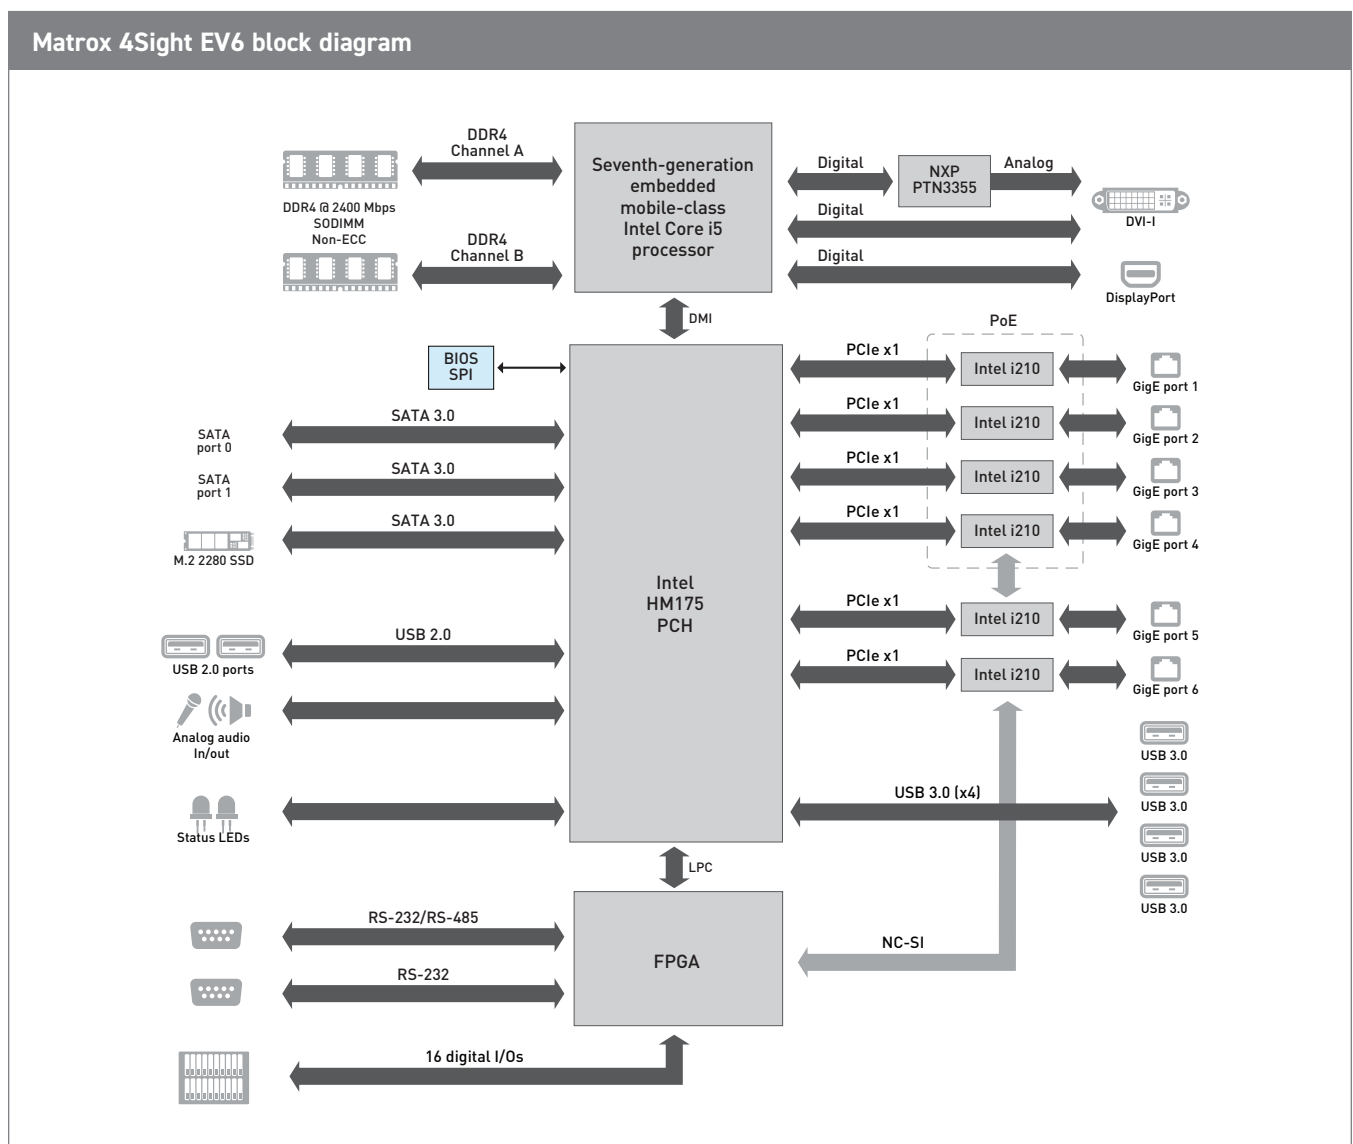


Connectivity (cont.)

Matrox 4Sight EV6 front and back views

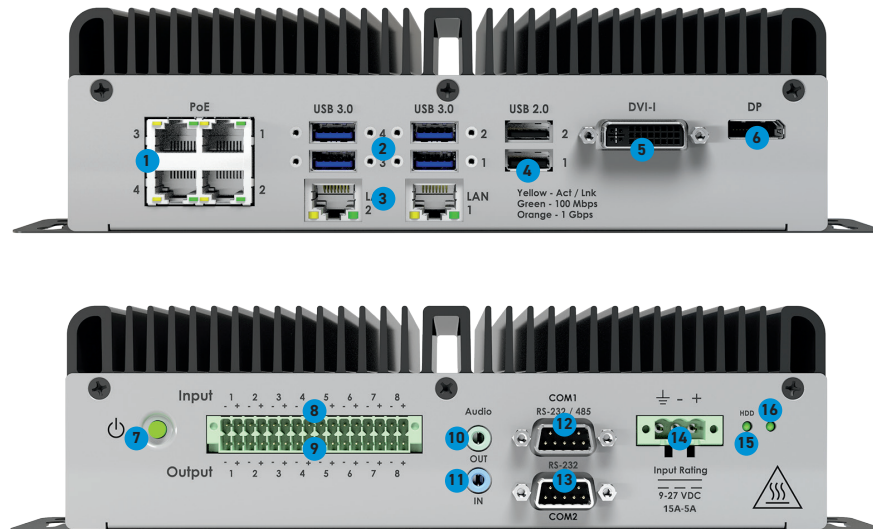

- | | | | | |
|------------------------------------|------------------|--------------------|------------------------|------------------|
| 1. Gigabit Ethernet ports with PoE | 4. USB 2.0 ports | 7. Power button | 11. Audio in | 14. Power input |
| 2. USB 3.0 ports | 5. DVI-I output | 8. Digital inputs | 12. RS-232/RS-485 port | 15. HDD LED |
| 3. Gigabit Ethernet ports | 6. DisplayPort | 9. Digital outputs | 13. RS-232 port | 16. Power-on LED |
| | | 10. Audio out | | |

Connectivity (cont.)

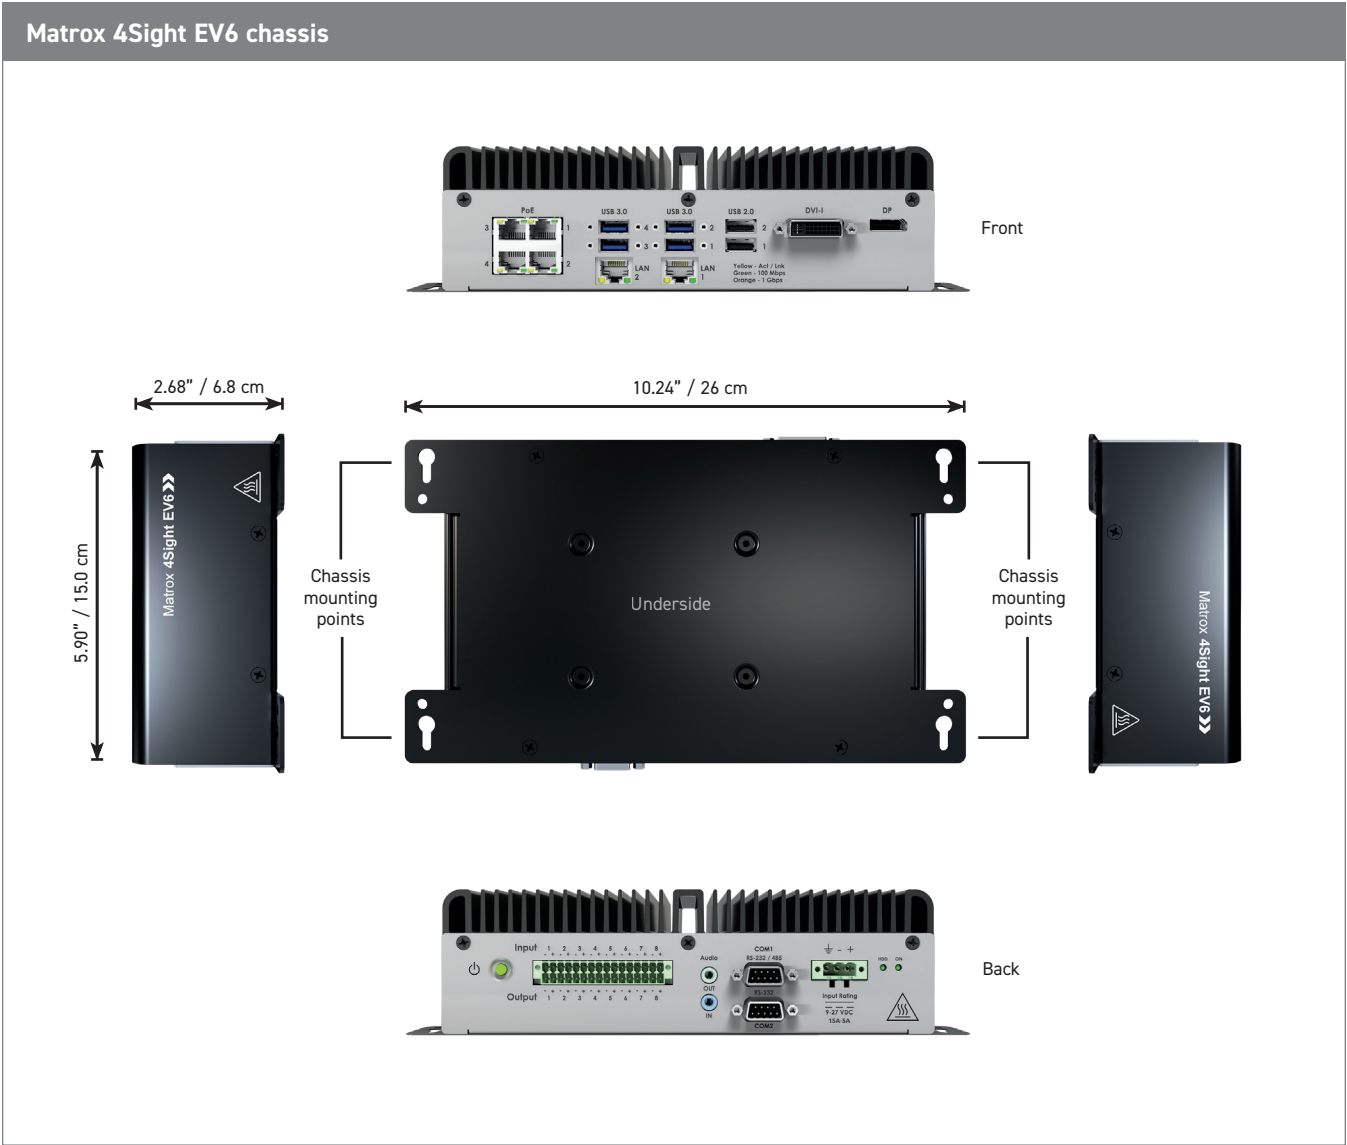

Specifications

Matrox 4Sight EV6
System
Intel Core i5-7442EQ
Intel HM175 Platform Controller Hub (PCH)
Two (2) 260-pin DDR4-2133/2400 SODIMM slots
Dual-head graphics support
One (1) DisplayPort output
Up to 4096x2304 @ 60 Hz
One (1) DVI-I display output
Up to 1920x1200 @ 60 Hz digital
Up to 2048x1536 @ 75 Hz analog
Six (6) Gigabit Ethernet ports (10/100/1,000)
Four (4) Gigabit Ethernet ports with PoE (up to 15.4 W per port)
Two (2) standard Gigabit Ethernet ports
Four (4) USB 3.0 ports
Two (2) USB 2.0 ports
Two (2) SATA 3.0 ports (internal)
One (1) M.2 connector (used by supplied 64 GB M.2 2280 SSD)
One (1) 24-bit stereo audio input and 24-bit stereo output
One (1) RS-232 port
One (1) RS-232/RS-485 port
Sixteen (16) digital I/Os
Eight (8) inputs
Up to 24 V
Eight (8) outputs (open collector)
100 mA maximum @ 24 VDC
64 GB M.2 2280 SATA 3.0 SSD
Power input: 9-27 VDC (nominal 24 VDC @ 4.2 A)
Chassis
Dimensions (L x W x H): 22.5 x 15.0 x 6.8 cm (8.86 x 5.90 x 2.68 in)
Four (4) mounting slots
Fanless enclosure
Power switch
Power and HDD notification LEDs
Mounting
Horizontal or vertical mounting
Certifications
FCC Class A
ICES-003 Class A
CE Class A
RCM Class A
KC Class A
CSA 61010-1-12

Specifications (cont.)

Matrox 4Sight EV6
Environmental
Operating temperature: 0°C to 50°C (32°F to 122°F)
Storage temperature: -40°C to 85°C (-40°F to 185°F)
Relative humidity: Up to 90% (non-condensing)
Software
Pre-loaded with Microsoft Windows 10 IoT Enterprise 2019 (64-bit)
Pre-loaded with MIL X and Matrox Design Assistant X run-time environments
Optionally pre-loaded with Matrox Design Assistant X development and run-time environments

Ordering Information

Part number	Description
Hardware	
EV6I5M16	Matrox 4Sight EV6 integrated unit with Intel Core i5-7442EQ, 16 GB DDR4 RAM, 64 GB M.2 MLC SSD, and Microsoft Windows 10 IoT Enterprise 2019 (64-bit). Pre-loaded with MIL X and Matrox Design Assistant X run-time environments. Partially licensed for Matrox Design Assistant X and MIL X. Note: The use of this product is governed by Microsoft Software License Terms , among others.
EV6I5M16DA	Matrox 4Sight EV6 integrated unit with Intel Core i5-7442EQ, 16 GB DDR4 RAM, 64 GB M.2 MLC SSD, and Microsoft Windows 10 IoT Enterprise 2019 (64-bit). Pre-loaded with Matrox Design Assistant X design-time and run-time environments. Partially licensed for Matrox Design Assistant X and MIL X. Note: The use of this product is governed by Microsoft Software License Terms , among others.
EV6I5M16DA+	Matrox 4Sight EV6 integrated unit with Intel Core i5-7442EQ, 16 GB DDR4 RAM, 64 GB M.2 MLC SSD, and Microsoft Windows 10 IoT Enterprise 2019 (64-bit). Pre-loaded with Matrox Design Assistant X design-time and run-time environments. Fully licensed for Matrox Design Assistant X and MIL X. Note: The use of this product is governed by Microsoft Software License Terms , among others.
EV6PS*	150 W AC/DC power adapter (100–240 VAC input/24 VDC output) for Matrox 4Sight EV6.
Software	
Included with EV6I5M16	Licensed for the Matrox Design Assistant X / MIL X Interface, Distributed MIL and Industrial and Robot Communications run-time packages. See Matrox Design Assistant X and Matrox Imaging Library (MIL) X datasheets for more information.
Included with EV6I5M16DA and EV6I5M16DA+	Separate installation media with the Matrox Design Assistant IDE and on-line documentation as well as a Matrox Design Assistant Maintenance registration number. Pre-loaded with the Matrox Design Assistant X design-time and run-time environment. Allow the Matrox Design Assistant IDE to run when it is connected to them. EV6I5M16DA is licensed for the Matrox Design Assistant X / MIL X Machine Vision, Identification, Image Compression, Interface, Distributed MIL, Metrology, Color Analysis, and Industrial and Robot Communications run-time packages. The String Reader and SureDotOCR®, Geometric Model Finder, Registration, 3D Calibration and Supplemental and Classification packages need to be licensed separately. See Matrox Design Assistant X and Matrox Imaging Library (MIL) X datasheets for more information. EV6I5M16DA+ is licensed for all Matrox Design Assistant X and MIL X run-time packages.

Endnotes:

1. The software may be protected by one or more patents; see www.matrox.com/patents for more information.

The Matrox Imaging advantage



Assured quality & longevity

Adhering to industry best practices in all hardware manufacturing and software development, product designs pay careful attention to component selection to secure consistent long-term availability. Matrox Imaging is able to meet Copy Exact and Revision Change Control procurement requirements in particular circumstances, backed by a dedicated team of QA specialists.



Trusted industry standards

Matrox Imaging champions industry standards in its design and production. Leveraging these standards to deliver quality compatible products, Matrox Imaging protects its customers' best interests by ensuring hardware and software components work with as many third-party products as possible.



Comprehensive customer support

Devoted front-line support and applications teams are on call to offer timely product installation, usage, and integration assistance. Matrox Professional Services delivers deep technical assistance to help customers develop their particular applications in a timely fashion. Services include personalized training and device interfacing as well as application feasibility, prototyping, troubleshooting, and debugging.



Tailored customer training

Matrox Vision Academy comprises online and on-premises training for Matrox Imaging vision software tools. On-premises intensive training courses are regularly held at Matrox headquarters, and can also be customized for onsite delivery. The Matrox Vision Academy online training platform hosts a comprehensive set of on-demand videos available when and where needed.



Long-standing global network

Matrox Imaging customers benefit from a global network of distributors who offer complementary products and support, and integrators who build customized vision systems. These relationships are built on years of mutual trust and span the globe, ensuring customer access to only the best assistance in the industry.



19 Avenue de Norvège
91140 Villebon sur Yvette
FRANCE

info@techway.com
+33 (0)1 64 53 37 90

www.techway.com

ABOUT MATROX IMAGING

Matrox Imaging, now a part of Zebra Technologies, is an established and trusted supplier to top OEMs and integrators involved in machine vision, image analysis, and medical imaging industries. The components consist of smart cameras, 3D sensors, vision controllers, I/O cards, and frame grabbers, all designed to provide optimum price-performance within a common software environment. For more information, visit www.matrox.com/imaging

The use of the terms "industrial" or "factory-floor" do not indicate compliance to any specific industrial standards.

"ZEBRA and the stylized Zebra head are trademarks of Zebra Technologies Corp., registered in many jurisdictions worldwide. All other trademarks are the property of their respective owners. ©2022 Zebra Technologies Corp. and/or its affiliates."

MATROX IMAGING est distribué par TECHWAY S.A.S. - www.techway.com - info@techway.com - +33 1 64 53 37 90