

GALLEON XSR RUGGED NAS

High Performance Network-Attached Storage

The Galleon XSR Rugged NAS offers superior performance in an ultra small form factor. Removable storage ensures short ground times for airborne applications. Industry standard solid-state drives are used to benefit from the ever increasing storage densities and cost reductions as the technology evolves.

The XSR NAS is capable of handling a high number of simultaneous connections without compromising system performance. Both optical 10Gb and traditional Gigabit Ethernet optical or copper connections are available to suit existing infrastructure.

The unit can be delivered with Windows Embedded Storage Server, Linux Enterprise Server or FreeNAS SW preconfigured to suit your application needs. An optional AES 256-bit hardware encryption module provides a high level of data security with flexible key loading options, including physical key tokens through front panel key loading port and remote loading over a secure network connection.

Galleon Embedded Computing's quality management system is certified to Aerospace Standard AS/EN 9100:2016 and ISO 9001:2015.

Small Rugged NAS



KEY FEATURES

- Small: 156 x 175 x 103mm (conduction cooled)
- Up to 13 GbE ports (or 1000Base-T)
- Up to 8 10Gbit Ethernet ports (optical)
- SMB/CIFS, NFS, AFP, FTP, HTTP and rsync
- RAID 0, 1 and 5 support
- Optional hardware AES-256 encryption
- GPS unit for date and time synchronization
- Up to 40TB SLC or 80TB MLC removable solid-state storage
- Wide input 16-40V DC input power
- Rugged conduction or air cooled designs
- Windows, Linux or BSD


APPLICATIONS

- UAVs, UGVs
- Surveillance
- Flight management
- Map systems
- Cockpit information systems

BENEFITS

- SWaP optimized
- High performance
- Flexible and scalable
- Rugged design

TECHNICAL SPECIFICATION

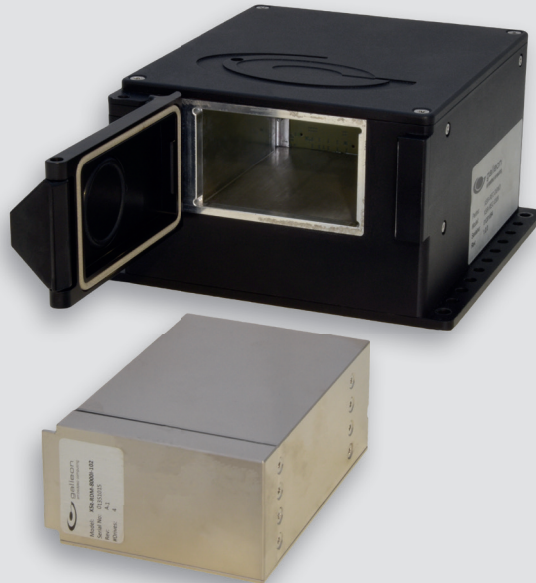

Network

- Up to 13 GbE ports (1000Base-T)
- Up to 8 10Gbit Ethernet ports (optical)

Storage

- Up to 40TB SLC removable SSD
- Up to 80TB MLC removable SSD
- RAID modes 0, 1 and 5
- Supported file systems: EXT4, UFS, FAT, NTFS
- Exported file systems: SMB/CIFS, NFS, AFP, FTP, HTTP and rsync
- Certified FIPS 140-2 encryption (AES-256)

Monitoring

- SMART
- SNMP
- Syslog

Front Panel Interfaces

- Removable storage bay

Rear Panel Interfaces

- 5x 1000Base-T GbE
- 8x 1000Base-T or 1000Base-X GbE (optional)
- 8x 10GbE (optional)
- 1x Power
- 1x GPS antenna input

Operating Temperature

- 0°C to +50°C standard temp.
- -20°C to +65°C extended temp. (AC)
- -40°C to +71/75°C extended temp. (CC)

Shock and Vibration

- Tested to MIL-STD-810

EMI/RFI

- Tested to MIL-STD-461

Altitude

- -1500 to 40 000 ft (AC)*
- -1500 to 60 000 ft (CC)*

Humidity

- Up to 100%, condensing

Size, Weight & Power

- 157 x 201 x 103mm (6.2 x 7.9 x 4.1")**
- 194 x 341 x 89mm (7.6 x 13.4 x 3.5")***
- Power: from 5W idle (configuration dependent)

Power Supply

- 16-40V DC wide input

*Contact factory for high altitude options

**9 channel, conduction cooled, small form factor

***13 channel, conduction cooled, half rack

ABOUT GALLEON

Galleon Embedded Computing is an innovative leader in development of high-performance, high-quality storage solutions and small rugged data recorder systems, servers and NAS devices.

Galleon's offerings span from commercial grade products for benign environments to ruggedized conduction-cooled products for deployed systems in severe environments.

RELATED PRODUCTS

- Offload Systems
- XSR Removable Data Module
- Titan 10GbE XMC
- Titan GbE XMS
- Galleon Extended Warranty and Support

